
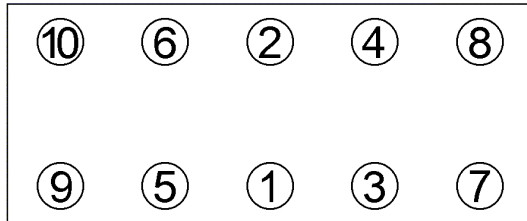


Anziehvorschrift für Zylinderkopf	550.570	
Tightening Instructions for Cylinder Head		
Instructions de serrage pour culasse		
Prescripciones de apriete para culatas		
	passend für / suitable for adaptable à / adaptable a	Daewoo / Chevrolet
		Das Original

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo



Anziehen/ * 25 Nm
Tightening/ ➤ 70°
Serrage/ ➤ 70°
Apriete ➤ 50°

Zeichenerklärung / Explanations / Explication / Explicacion

*	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Chevrolet
MC:F14D3+F16D3 69-80 KW
Lacetti, Nubira, Kalos 1.4 ltr.+1.6 ltr.16V: 03.0
Optra 1.6ltr.: 08.03-
Daewoo
MC: F14D3 + F16D3 69-77 KW
Gentra 1.4 ltr. SR: 05.03 - 04.05
Gentra 1.4 ltr. + 1.6 ltr. E-Tec LS: 05.05-

ElringKlinger AG, Max-Eyth-Str.2
72581 Dettingen / Erms. Tel. 07123/724 601

550.570