
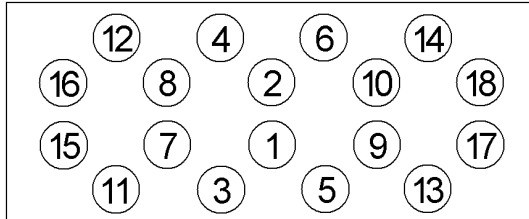


<b>Anziehvorschrift für Zylinderkopf</b>	<b>832.962</b>	 Das Original
<b>Tightening Instructions for Cylinder Head</b>		
<b>Instructions de serrage pour culasse</b>		
<b>Prescripciones de apriete para culatas</b>		
passend für / suitable for adaptable à / adaptable a		<b>Mercedes-Benz</b>

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



820.106  
M 10x80/102/115



Anziehen/	*	15 Nm
Tightening/		35 Nm M 8: 25 Nm
Serrage/	➤	90°
Apriete	●	10 min
	➤	90°

Zeichenerklärung / Explanations / Explication / Explicacion

*	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

89 Ø

Mot. M.B. 601.942 (D 23), 60 kW (82 PS)  
M.B. 601.940,  
M.B. 601.941,            58 kW (79 PS)  
M.B. 601.943,            60 kW (82 PS)  
108 D Viano, 208 D, 308 D, 408 D, 508 D,

ElringKlinger AG, Max-Eyth-Str.2  
72581 Dettingen / Erms. Tel. 07123/724 601

**\*832.962\***