



BC00073

DAF, MERCEDES (INDUSTRIAL)

A

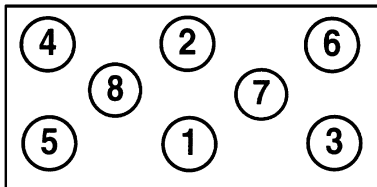

B



DAF / MERCEDES-BENZ

- 1) Bolts: 1, 2, 3, 4, 5, 6
- 2) 2 Kpm \pm 0,2 Kpm
- 3) 90° +10°/-5°
- 4) 90° +10°/-5°

MERCEDES-BENZ

- 1) Bolts: 1, 2, 3, 4, 5, 6
- 2) 2,5 Kpm \pm 0,2 Kpm
- 3) 90° +10°/-5°
- 4) Bolts: 7, 8
- 5) 0,7 Kpm \pm 0,2 Kpm
- 6) 90° +10°/-5°

DAF / MERCEDES-BENZ

- 1) Bolts: 1, 2, 3, 4, 5, 6
- 2) 15 lbft \pm 1,5 lbft
- 3) 90° +10°/-5°
- 4) 90° +10°/-5°

MERCEDES-BENZ

- 1) Bolts: 1, 2, 3, 4, 5, 6
- 2) 18 lbft \pm 1, 5 lbft
- 3) 90° +10°/-5°
- 4) Bolts: 7, 8
- 5) 5 lbft \pm 1,5 lbft
- 6) 90° +10°/-5°



Ajusa is not responsible for any upgrade after this document had been printed. For more info, please scan the QR code or visit our website ajusa.es.

Ajusa no se responsabiliza de cualquier actualización posterior a la impresión de este documento. Para más información, escanee el código QR o visite nuestra página web ajusa.es.

