

Water pump affected:

**P246**

**P247**

**Installation instructions:**


⇒ In accordance with information of the vehicle manufacturer is important during installation of the coolant pump, that the pump shaft spline must be coated with a suitable high-temperature lubricant like Molykote M77 or equivalent!

**Important note:**

Please, heed the specifications of the vehicle manufacturer!

**Lubricant recommendation:**

Molykote M77

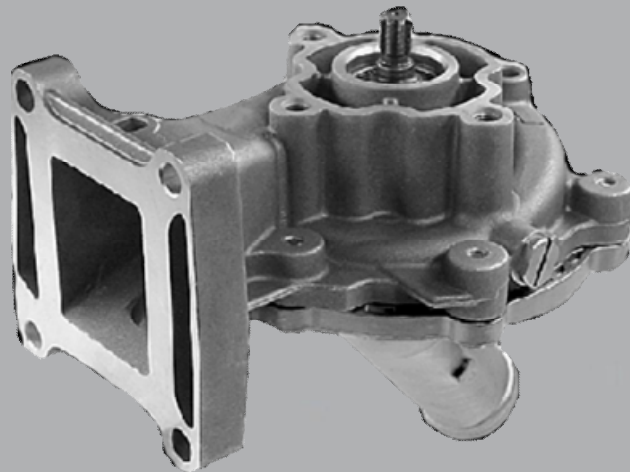

During the assembly of the pump, the shaft spline must be coated with a suitable high performance-temperature fat paste like Molykote M-77 assembly paste or similar!

**Suitable for:**

Ford Mondeo III  
Ford Transit  
Jaguar X-Type

**Affected engine codes:**

D5BA D6BA SDBA N7BA  
HJBA HJBB HJBC FMBA  
QJBA QJBB QJBC QJBD  
ABFA F3FA D3FA FIFA  
R4-X404 LJ46G FMBA

**Comparable to OE-No.:**

1116996 1143851  
1341835 1347102  
1417825 1477444  
XS7Q 8K500 AE /AH  
XS7Q 8K500 AJ /AK

**INFORMATION:**

Corresponding spare parts can be found in our online catalog at [www.hepu.de](http://www.hepu.de)

HEPU Autoteile GmbH  
Am Kreuzweg 2  
D-32689 Kalletal

Tel +49(0)5264 - 6483-40  
Fax +49(0)5264 - 6483-44  
[www.hepu.de](http://www.hepu.de)  
[info@hepu.de](mailto:info@hepu.de)



MADE IN GERMANY